

Project Procedures:

Scans were completed at 5-8 feet intervals in the north and south directions.

There were many obstructing trees throughout the entire cemetery property.

All measurements were recorded using the telephone pole on the southeast corner of the property as the control point.

All data was collected on October 11, 2022.

Project Results:

The data collected determined multiple anomalies consistent to that of a full body burial location. These areas were indicated on site with white flags.

There was a total of 64 unmarked burials and 17 marked burials.



Please note, because of the nature of and age of the body burials in this cemetery, many different underground obstructions including but not limited to tree root systems may conceal evidence of the body burials or even create false anomalies masking as body burial locations.

The above information is also presented in the photographs and site drawing attached to this report.

This report provided by FMCI is provided solely for illustration and information purposes. FMCI is not responsible for any loss or damage caused, arising out of the use of, or reliance on this report or the data collected, and this report is not to be construed as a warranty or guarantee on the part of FMCI.

Sincerely,

Josh Wiersma
Facility Management Consultants International

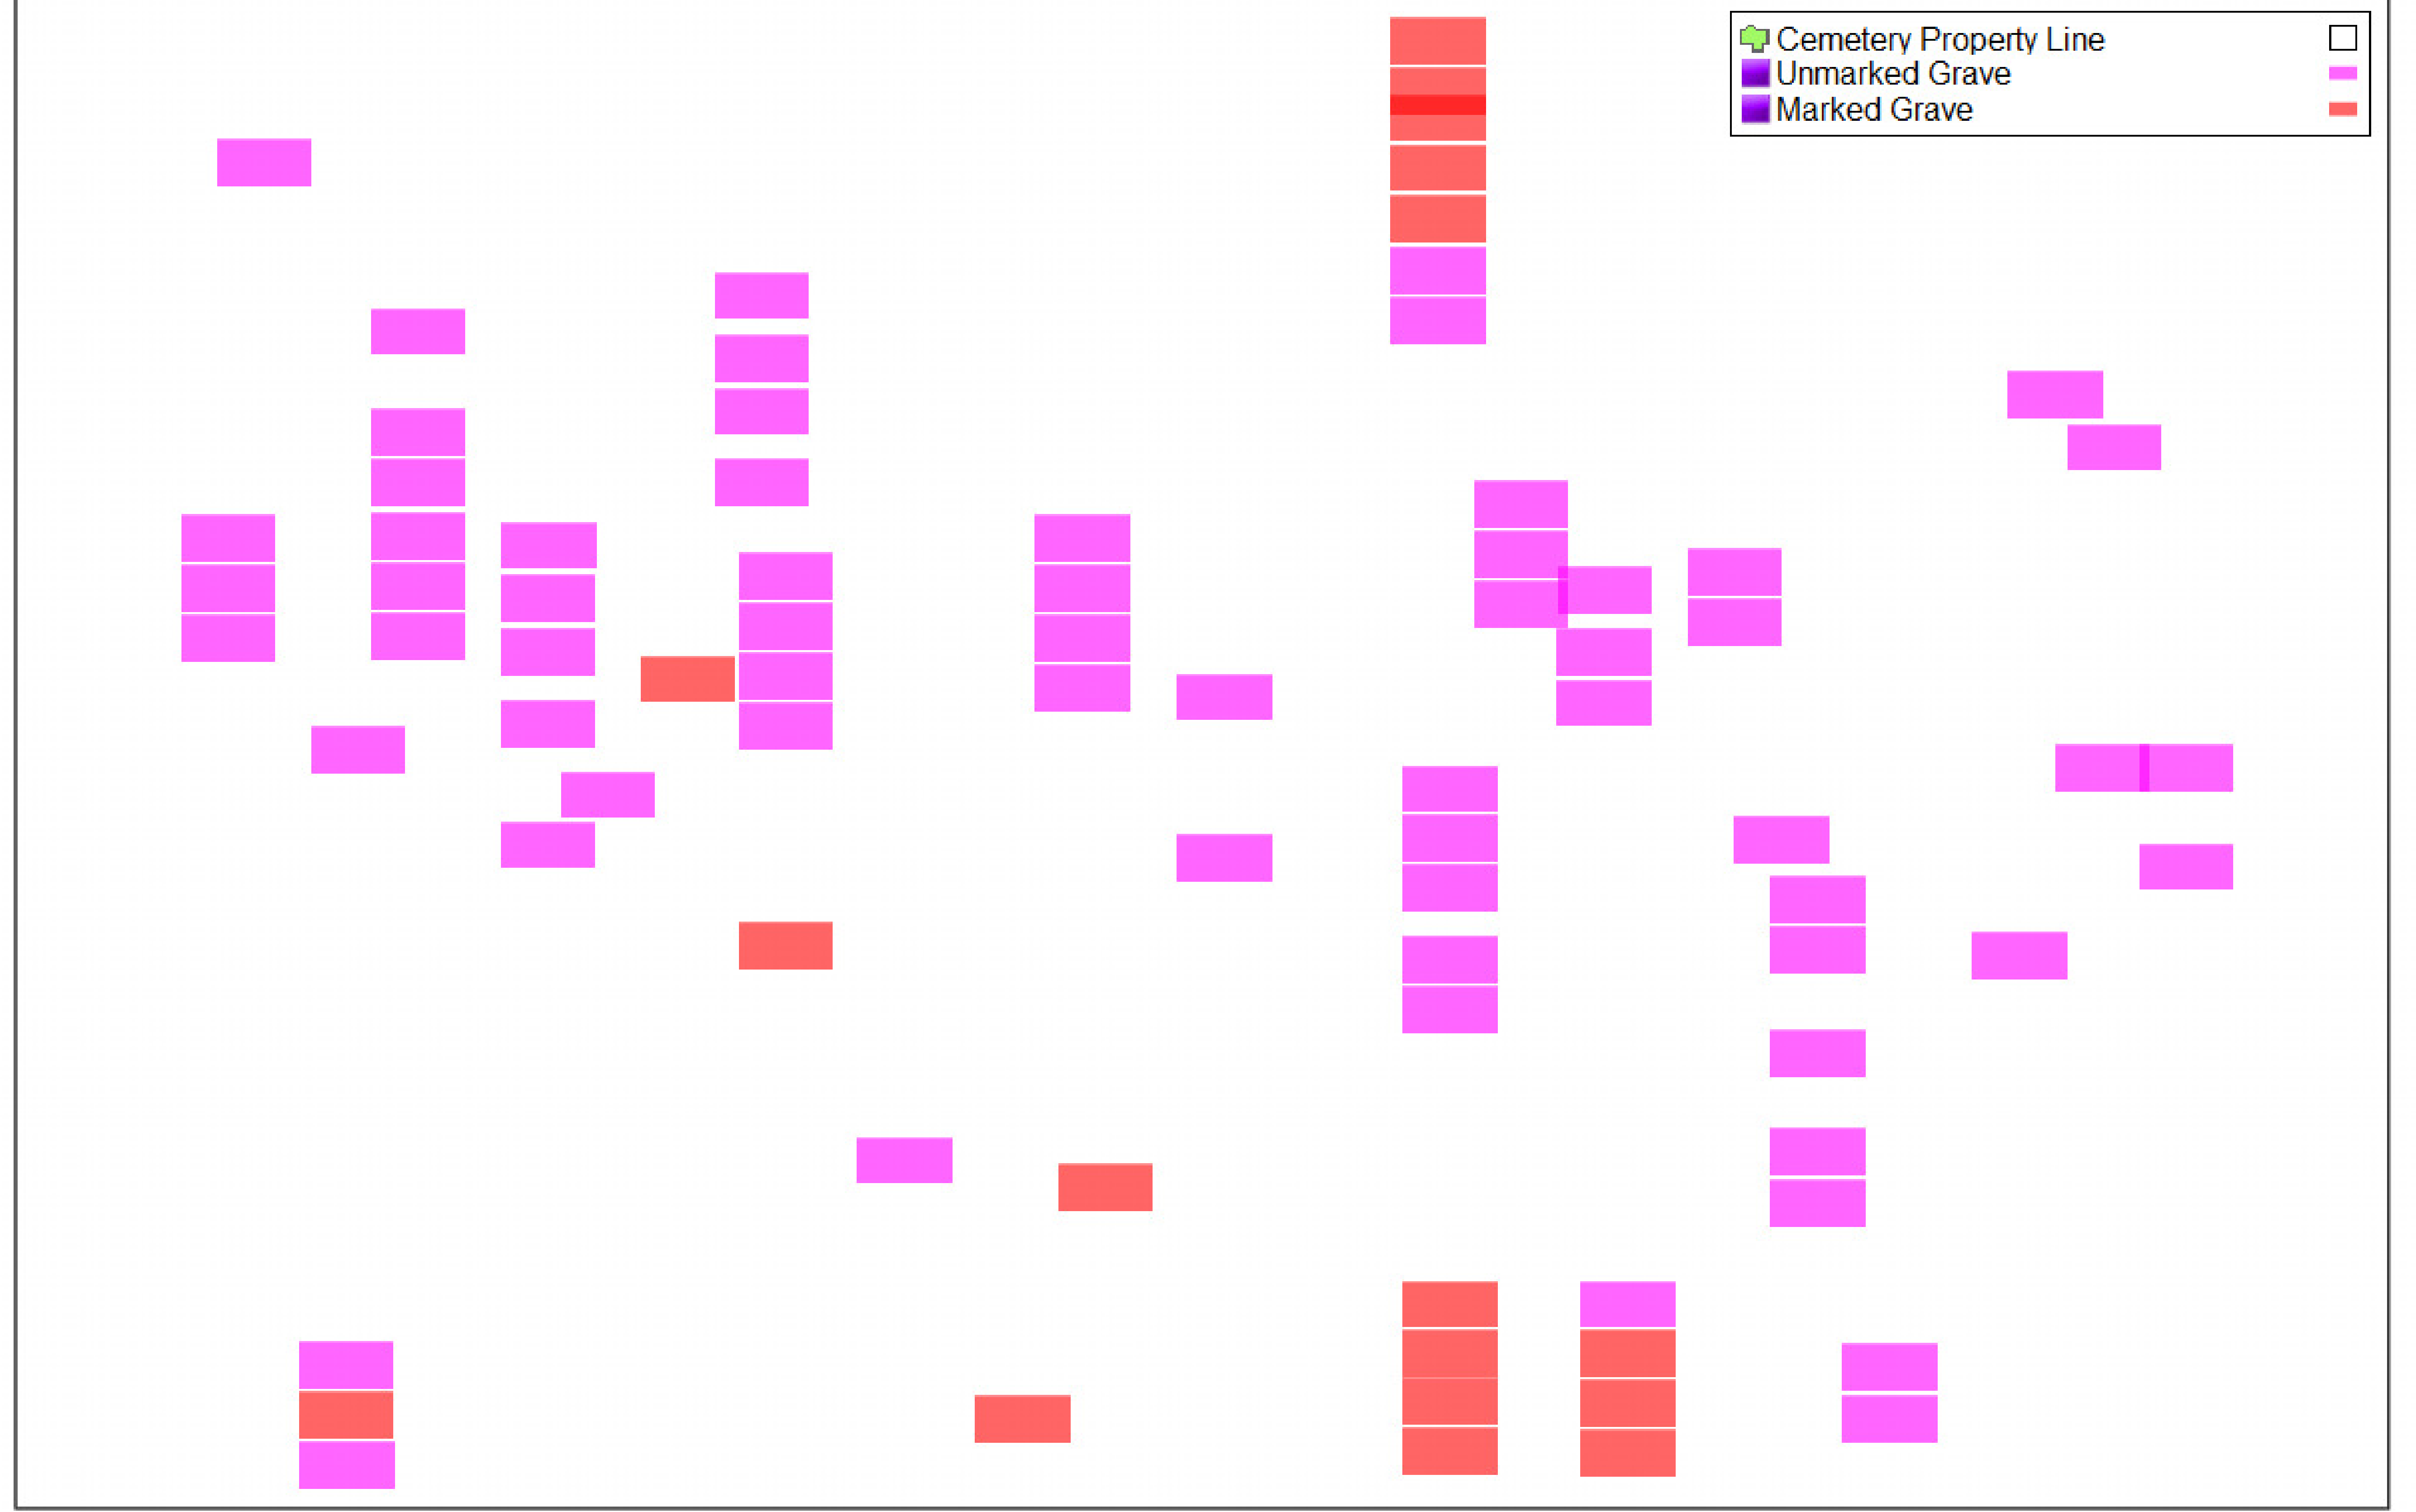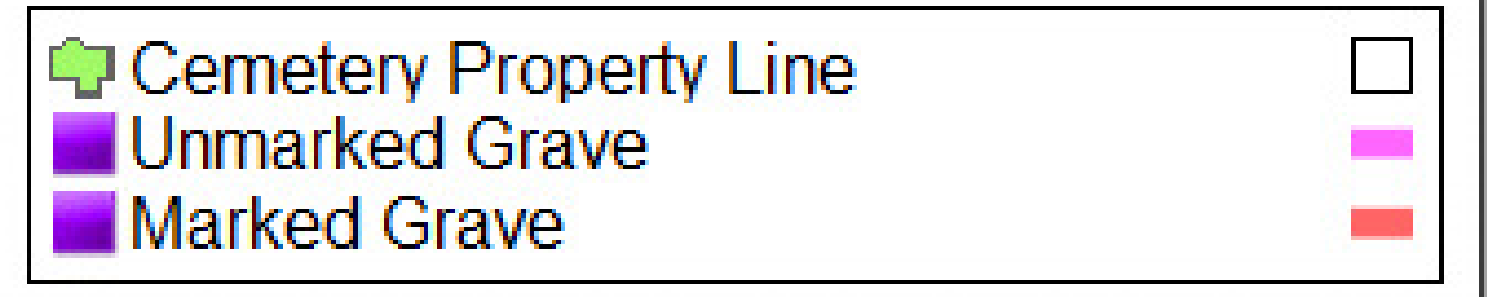

200'-0"

